

## Selection Guide: RF Connector Accessories

### RF Connector Accessories

RF connector accessories include **Protective Covers** and **Dummy Receptacles** for standard RF coax connectors.

Aluminum or stainless steel **Covers** have sealing gaskets and a variety of attachment styles.

Panel-mounted **Dummy Receptacles** provide stowage and protection for RF cables.

#### Dummy Receptacles for RF Connectors



**HN**  
650-072  
Page 26



**SMA**  
650-073  
Page 26



**N**  
650-074  
Page 26



**TNC**  
650-075  
Page 27




**BNC**  
650-076  
Page 27

#### Protective Covers for RF Connectors

##### SMA COVERS



**Plug**  
660-103  
Page 28




**Recep**  
660-104  
Page 29

##### TYPE N COVERS



**Plug**  
660-105  
Page 30




**Recep**  
660-106  
Page 31

##### TNC COVERS




**Plug**  
660-107  
Page 32



**Recep**  
660-108  
Page 33

##### BNC COVERS



**Plug**  
660-109  
Page 34



**Recep**  
660-110  
Page 35

**650-072 650-074  
650-073**


RF CONNECTOR ACCESSORIES

**650-072 DUMMY RECEPTACLE FOR TYPE HN COAX RF PLUGS**




Use dummy storage receptacle to secure and protect unused plugs. 650-072 receptacle accommodates Type HN coaxial plug connectors. Aluminum, stainless steel or brass.

PART NUMBER	
Aluminum 6061-T6	Electroless Nickel <b>650-072M</b>
	Black Zinc-Nickel <b>650-072ZR</b>
	Nickel-PTFE <b>650-072MT</b>
	O. D. Cadmium <b>650-072NF</b>
303 SST	Passivate <b>650-072Z1</b>
	Electroless Nickel <b>650-072ZM</b>
Brass	Electroless Nickel <b>650-072BM</b>
	White Bronze <b>650-072WB</b>

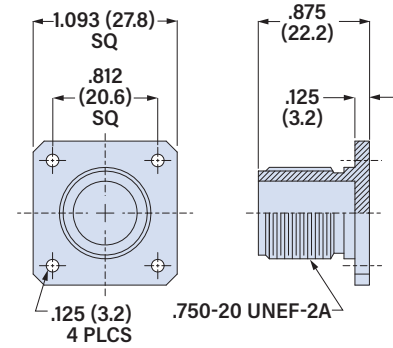


**650-073 DUMMY RECEPTACLE FOR SMA COAX RF PLUGS**




Use dummy storage receptacle to secure and protect unused plugs. 650-073 receptacle accommodates M39012 Series SMA connectors. Aluminum, stainless steel or brass.

PART NUMBER	
Aluminum 6061-T6	Electroless Nickel <b>650-073M</b>
	Black Zinc-Nickel <b>650-073ZR</b>
	Nickel-PTFE <b>650-073MT</b>
	O. D. Cadmium <b>650-073NF</b>
303 SST	Passivate <b>650-073Z1</b>
	Electroless Nickel <b>650-073ZM</b>
Brass	Electroless Nickel <b>650-073BM</b>
	White Bronze <b>650-073WB</b>

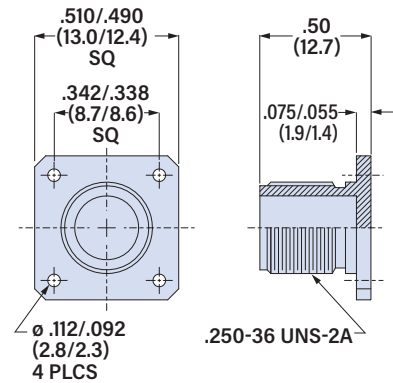


**650-074 DUMMY RECEPTACLE FOR TYPE N COAX RF PLUGS**




Use dummy storage receptacle to secure and protect unused plugs. 650-074 receptacle accommodates Type N RF connectors. Aluminum, stainless steel or brass.

PART NUMBER	
Aluminum 6061-T6	Electroless Nickel <b>650-074M</b>
	Black Zinc-Nickel <b>650-074ZR</b>
	Nickel-PTFE <b>650-074MT</b>
	O. D. Cadmium <b>650-074NF</b>
303 SST	Passivate <b>650-074Z1</b>
	Electroless Nickel <b>650-074ZM</b>
Brass	Electroless Nickel <b>650-074BM</b>
	White Bronze <b>650-074WB</b>

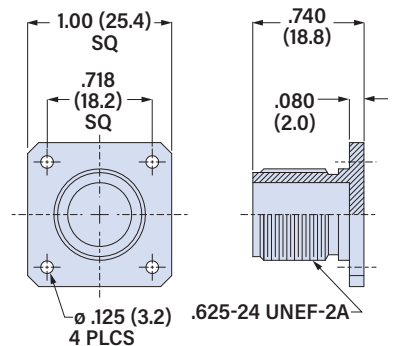


**650-075**  
**650-076**

**650-075 DUMMY RECEPTACLE FOR TNC COAX RF PLUGS**




Use dummy stowage receptacle to secure and protect unused plugs. 650-075 receptacle accommodates M39012 Series TNC RF connectors. Aluminum, stainless steel or brass.

PART NUMBER	
Aluminum 6061-T6	Electroless Nickel <b>650-075M</b>
	Black Zinc-Nickel <b>650-075ZR</b>
	Nickel-PTFE <b>650-075MT</b>
	O. D. Cadmium <b>650-075NF</b>
303 SST	Passivate <b>650-075Z1</b>
	Electroless Nickel <b>650-075ZM</b>
Brass	Electroless Nickel <b>650-075BM</b>
	White Bronze <b>650-075WB</b>

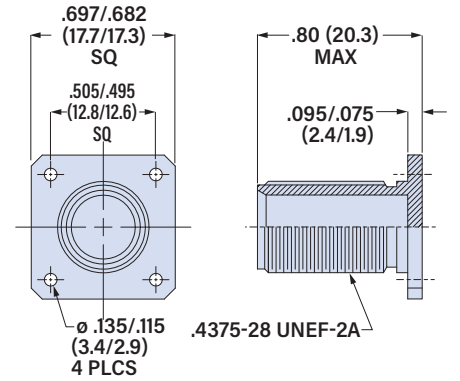


**650-076 DUMMY RECEPTACLE FOR BNC COAX RF PLUGS**



Use dummy stowage receptacle to secure and protect unused plugs. 650-076 receptacle accommodates M39012 Series BNC RF connectors. Aluminum, stainless steel or brass.

PART NUMBER	
Aluminum 6061-T6	Electroless Nickel <b>650-076M</b>
	Black Zinc-Nickel <b>650-076ZR</b>
	Nickel-PTFE <b>650-076MT</b>
	O. D. Cadmium <b>650-076NF</b>
303 SST	Passivate <b>650-076Z1</b>
	Electroless Nickel <b>650-076ZM</b>
Brass	Electroless Nickel <b>650-076BM</b>
	White Bronze <b>650-076WB</b>

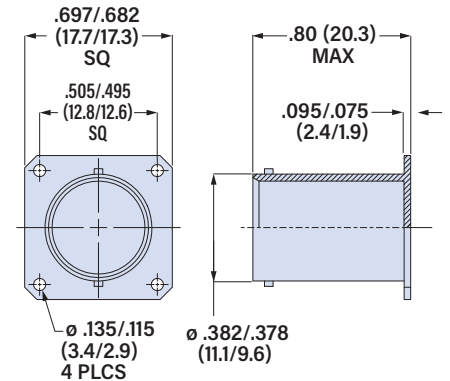

# 660-103

## Protective Cover for SMA Plug

### SMA Plug Cover



660-103 protective cover fits SMA plug connectors. Aluminum or stainless steel, with stainless steel fittings. Silicone gasket.








### PART NUMBER

<b>660-103</b>	<b>M</b>	<b>G</b>	<b>06</b>	<b>-4</b>
<b>Base P/N</b>	<b>660-103</b>			
<b>Material/Finish</b>	See Table 1			
<b>Attachment Type</b>	<b>N</b> No Attachment See Table 2 for Attachment Types			
<b>Attachment Ring</b>	Omit for Attachment Type N <b>00</b> No Ring See Table 3 for Attachment Ring Codes			
<b>Attachment Length</b>	Omit for Attachment Type N Length in One Inch Increments			




### TABLE 1 MATERIAL / FINISH


Aluminum		Stainless Steel	
<b>M</b>	Electroless Nickel	<b>Z1</b>	Passivate
<b>NF</b>	Olive Drab Cadmium	<b>ZM</b>	Nickel-plated
<b>MT</b>	Nickel-PTFE		
<b>ZR</b>	Black Zinc-Nickel		

### TABLE 2 ATTACHMENT TYPE

<b>D</b>	 <b>SST Bead Chain</b> .125 (3.2) diameter, size 6, -65 to +200 °C
<b>F</b>	 <b>Wire Rope, Blue Nylon Jacket</b> 6/6 nylon over stainless steel rope, fair flexibility, good abrasion resistance, -55 to +100 °C
<b>G</b>	 <b>Black Nylon Rope</b> Very flexible, good abrasion and fuel resistance, .094 (2.4) diameter, -55 to +100 °C
<b>H</b>	 <b>Wire Rope, Clear FEP Jacket</b> Clear FEP jacket over SST rope, fair flexibility, good abrasion resistance, .100" diameter, -65 to +200 °C
<b>S</b>	 <b>Sash Chain</b> #8 sash chain, stainless steel. Length tolerance is ± one link .280 (71)
<b>T</b>	 <b>SST Wire Rope, No Jacket</b> Good flexibility, good abrasion resistance, .047 (1.2) diameter, passivated, -65 to +200 °C
<b>U</b>	 <b>SST Wire Rope, Black Polyurethane</b> Black polyurethane coating, very flexible, excellent abrasion resistance, .080" (2mm) diameter, -55 to +125 °C

### TABLE 3 ATTACHMENT RING

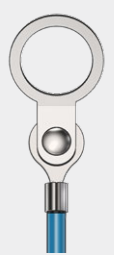EYELET		
	Code	Eyelet I.D.
	<b>06</b>	.125 (3.2)
	<b>01</b>	.140 (3.6)
	<b>02</b>	.182 (4.6)
	<b>04</b>	.197 (5.0)
SOLID RING		
	Code	Ring I.D.
	<b>095</b>	.312 (7.9)
	<b>100</b>	.391 (9.9)
	<b>101</b>	.516 (13.1)
	<b>102</b>	.583 (14.8)
	<b>103</b>	.641 (16.3)
	<b>104</b>	.708 (18.0)
	<b>105</b>	.766 (19.5)
	<b>106</b>	.896 (22.2)
	<b>107</b>	1.016 (25.8)
SPLIT RING		
	Code	Ring I.D.
	<b>52</b>	.485 (12.3)
	<b>54</b>	.640 (16.3)
	<b>56</b>	.750 (19.1)
	<b>58</b>	.890 (22.6)
	<b>60</b>	1.015 (25.8)

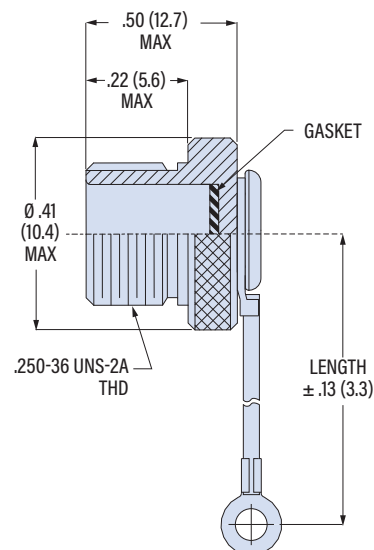

# 660-104

## Protective Cover for SMA Receptacle

### SMA Receptacle Cover



**TABLE 1 MATERIAL / FINISH**








Aluminum		Stainless Steel	
<b>M</b>	Electroless Nickel	<b>Z1</b>	Passivate
<b>NF</b>	Olive Drab Cadmium	<b>ZM</b>	Nickel-plated
<b>MT</b>	Nickel-PTFE		
<b>ZR</b>	Black Zinc-Nickel		

660-103 protective cover fits SMA plug connectors. Aluminum, stainless steel, or composite. Stainless steel fittings. Silicone gasket.




### PART NUMBER


<b>660-104</b>	<b>Z1</b>	<b>D</b>	<b>101</b>	<b>-5</b>
<b>Base P/N</b>	<b>660-104</b>			
<b>Material/Finish</b>	See Table 1			
<b>Attachment Type</b>	<b>N</b> No Attachment See Table 2 for Attachment Types			
<b>Attachment Ring</b>	Omit for Attachment Type N <b>00</b> No Ring See Table 3 for Attachment Ring Codes			
<b>Attachment Length</b>	Omit for Attachment Type N Length in One Inch Increments			

**TABLE 2 ATTACHMENT TYPE**

<b>D</b>	 <b>SST Bead Chain</b> .125 (3.2) diameter, size 6, -65 to +200 °C
<b>F</b>	 <b>Wire Rope, Blue Nylon Jacket</b> 6/6 nylon over stainless steel rope, fair flexibility, good abrasion resistance, -55 to +100 °C
<b>G</b>	 <b>Black Nylon Rope</b> Very flexible, good abrasion and fuel resistance, .094 (2.4) diameter, -55 to +100 °C
<b>H</b>	 <b>Wire Rope, Clear FEP Jacket</b> Clear FEP jacket over SST rope, fair flexibility, good abrasion resistance, .100" diameter, -65 to +200 °C
<b>S</b>	 <b>Sash Chain</b> #8 sash chain, stainless steel. Length tolerance is ± one link .280 (Z1)
<b>T</b>	 <b>SST Wire Rope, No Jacket</b> Good flexibility, good abrasion resistance, .047 (1.2) diameter, passivated, -65 to +200 °C
<b>U</b>	 <b>SST Wire Rope, Black Polyurethane</b> Black polyurethane coating, very flexible, excellent abrasion resistance, .080" (2mm) diameter, -55 to +125 °C

**TABLE 3 ATTACHMENT RING**

EYELET		
	<b>Code</b>	<b>Eyelet I.D.</b>
	<b>06</b>	.125 (3.2)
	<b>01</b>	.140 (3.6)
	<b>02</b>	.182 (4.6)
	<b>04</b>	.197 (5.0)
SOLID RING		
	<b>Code</b>	<b>Ring I.D.</b>
	<b>095</b>	.312 (7.9)
	<b>100</b>	.391 (9.9)
	<b>101</b>	.516 (13.1)
	<b>102</b>	.583 (14.8)
	<b>103</b>	.641 (16.3)
	<b>104</b>	.708 (18.0)
	<b>105</b>	.766 (19.5)
	<b>106</b>	.896 (22.2)
	<b>107</b>	1.016 (25.8)
SPLIT RING		
	<b>Code</b>	<b>Ring I.D.</b>
	<b>52</b>	.485 (12.3)
	<b>54</b>	.640 (16.3)
	<b>56</b>	.750 (19.1)
	<b>58</b>	.890 (22.6)
	<b>60</b>	1.015 (25.8)

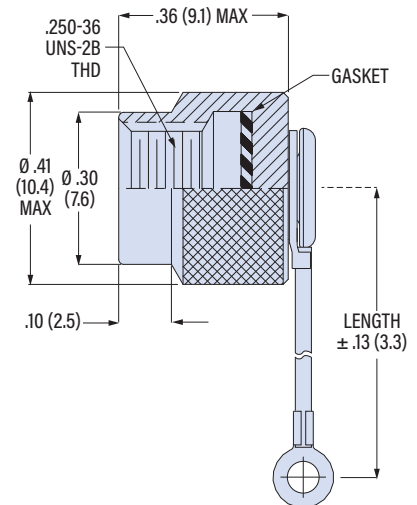

# 660-105

## Protective Cover for Type N Plug

### N Plug Cover



660-105 protective cover fits type N plug connectors. Aluminum or stainless steel, with stainless steel fittings. Silicone gasket.








### PART NUMBER

	<b>660-105</b>	<b>ZR</b>	<b>U</b>	<b>04</b>	<b>-3</b>
<b>Base P/N</b>	<b>660-105</b>				
<b>Material/Finish</b>	See Table 1				
<b>Attachment Type</b>	<b>N</b> No Attachment See Table 2 for Attachment Types				
<b>Attachment Ring</b>	Omit for Attachment Type N <b>00</b> No Ring See Table 3 for Attachment Ring Codes				
<b>Attachment Length</b>	Omit for Attachment Type N Length in One Inch Increments				




### TABLE 1 MATERIAL / FINISH


Aluminum		Stainless Steel	
<b>M</b>	Electroless Nickel	<b>Z1</b>	Passivate
<b>NF</b>	Olive Drab Cadmium	<b>ZM</b>	Nickel-plated
<b>MT</b>	Nickel-PTFE		
<b>ZR</b>	Black Zinc-Nickel		

### TABLE 2 ATTACHMENT TYPE

<b>D</b>		<b>SST Bead Chain</b> .125 (3.2) diameter, size 6, -65 to +200 °C
<b>F</b>		<b>Wire Rope, Blue Nylon Jacket</b> 6/6 nylon over stainless steel rope, fair flexibility, good abrasion resistance, -55 to +100 °C
<b>G</b>		<b>Black Nylon Rope</b> Very flexible, good abrasion and fuel resistance, .094 (2.4) diameter, -55 to +100 °C
<b>H</b>		<b>Wire Rope, Clear FEP Jacket</b> Clear FEP jacket over SST rope, fair flexibility, good abrasion resistance, .100" diameter, -65 to +200 °C
<b>S</b>		<b>Sash Chain</b> #8 sash chain, stainless steel. Length tolerance is ± one link .280 (71)
<b>T</b>		<b>SST Wire Rope, No Jacket</b> Good flexibility, good abrasion resistance, .047 (1.2) diameter, passivated, -65 to +200 °C
<b>U</b>		<b>SST Wire Rope, Black Polyurethane</b> Black polyurethane coating, very flexible, excellent abrasion resistance, .080" (2mm) diameter, -55 to +125 °C

### TABLE 3 ATTACHMENT RING

EYELET		
	Code	Eyelet I.D.
	<b>06</b>	.125 (3.2)
	<b>01</b>	.140 (3.6)
	<b>02</b>	.182 (4.6)
	<b>04</b>	.197 (5.0)
SOLID RING		
	Code	Ring I.D.
	<b>095</b>	.312 (7.9)
	<b>100</b>	.391 (9.9)
	<b>101</b>	.516 (13.1)
	<b>102</b>	.583 (14.8)
	<b>103</b>	.641 (16.3)
	<b>104</b>	.708 (18.0)
	<b>105</b>	.766 (19.5)
	<b>106</b>	.896 (22.2)
	<b>107</b>	1.016 (25.8)
SPLIT RING		
	Code	Ring I.D.
	<b>52</b>	.485 (12.3)
	<b>54</b>	.640 (16.3)
	<b>56</b>	.750 (19.1)
	<b>58</b>	.890 (22.6)
	<b>60</b>	1.015 (25.8)

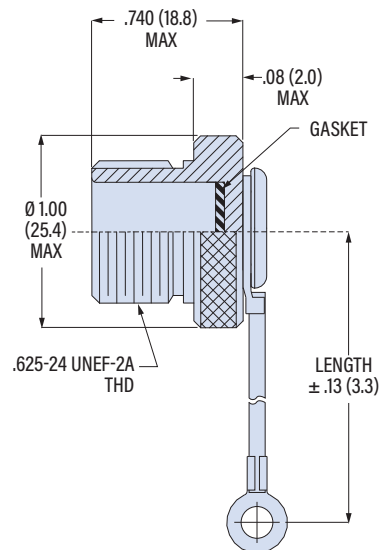

# 660-106

## Protective Cover for Type N Receptacle

### N Receptacle Cover



660-106 protective cover fits type N plug connectors. Aluminum or stainless steel, with stainless steel fittings. Silicone gasket.








### PART NUMBER

		<b>660-106</b>	<b>M</b>	<b>H</b>	<b>52</b>	<b>-4</b>
<b>Base P/N</b>	<b>660-106</b>					
<b>Material/Finish</b>	See Table 1					
<b>Attachment Type</b>	<b>N</b> No Attachment See Table 2 for Attachment Types					
<b>Attachment Ring</b>	<b>00</b> No Ring Omit for Attachment Type N See Table 3 for Attachment Ring Codes					
<b>Attachment Length</b>	Omit for Attachment Type N Length in One Inch Increments					




**TABLE 1 MATERIAL / FINISH**


Aluminum		Stainless Steel	
<b>M</b>	Electroless Nickel	<b>Z1</b>	Passivate
<b>NF</b>	Olive Drab Cadmium	<b>ZM</b>	Nickel-plated
<b>MT</b>	Nickel-PTFE		
<b>ZR</b>	Black Zinc-Nickel		

**TABLE 2 ATTACHMENT TYPE**

<b>D</b>	 <b>SST Bead Chain</b> .125 (3.2) diameter, size 6, -65 to +200 °C
<b>F</b>	 <b>Wire Rope, Blue Nylon Jacket</b> 6/6 nylon over stainless steel rope, fair flexibility, good abrasion resistance, -55 to +100 °C
<b>G</b>	 <b>Black Nylon Rope</b> Very flexible, good abrasion and fuel resistance, .094 (2.4) diameter, -55 to +100 °C
<b>H</b>	 <b>Wire Rope, Clear FEP Jacket</b> Clear FEP jacket over SST rope, fair flexibility, good abrasion resistance, .100" diameter, -65 to +200 °C
<b>S</b>	 <b>Sash Chain</b> #8 sash chain, stainless steel. Length tolerance is ± one link .280 (Z1)
<b>T</b>	 <b>SST Wire Rope, No Jacket</b> Good flexibility, good abrasion resistance, .047 (1.2) diameter, passivated, -65 to +200 °C
<b>U</b>	 <b>SST Wire Rope, Black Polyurethane</b> Black polyurethane coating, very flexible, excellent abrasion resistance, .080" (2mm) diameter, -55 to +125 °C

**TABLE 3 ATTACHMENT RING**

EYELET		
	<b>Code</b>	<b>Eyelet I.D.</b>
	<b>06</b>	.125 (3.2)
	<b>01</b>	.140 (3.6)
	<b>02</b>	.182 (4.6)
	<b>04</b>	.197 (5.0)
SOLID RING		
	<b>Code</b>	<b>Ring I.D.</b>
	<b>095</b>	.312 (7.9)
	<b>100</b>	.391 (9.9)
	<b>101</b>	.516 (13.1)
	<b>102</b>	.583 (14.8)
	<b>103</b>	.641 (16.3)
	<b>104</b>	.708 (18.0)
	<b>105</b>	.766 (19.5)
	<b>106</b>	.896 (22.2)
	<b>107</b>	1.016 (25.8)
SPLIT RING		
	<b>Code</b>	<b>Ring I.D.</b>
	<b>52</b>	.485 (12.3)
	<b>54</b>	.640 (16.3)
	<b>56</b>	.750 (19.1)
	<b>58</b>	.890 (22.6)
	<b>60</b>	1.015 (25.8)

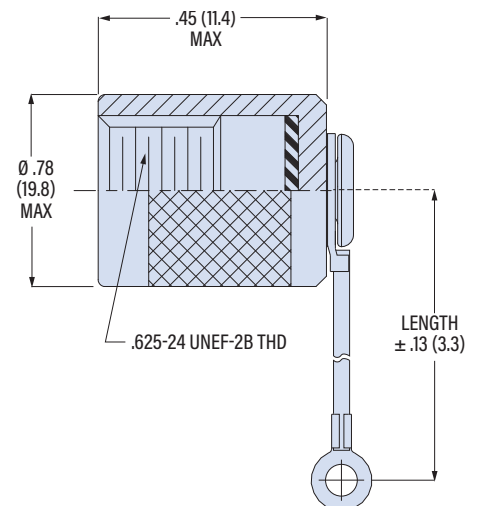

# 660-107

## Protective Cover for TNC Plug

### TNC Plug Cover



660-107 protective cover fits TNC plug connectors. Aluminum or stainless steel, with stainless steel fittings. Silicone gasket.








### PART NUMBER

	<b>660-107</b>	<b>M</b>	<b>H</b>	<b>095</b>	<b>-4</b>
<b>Base P/N</b>	<b>660-107</b>				
<b>Material/Finish</b>	See Table 1				
<b>Attachment Type</b>	<b>N</b> No Attachment See Table 2 for Attachment Types				
<b>Attachment Ring</b>	Omit for Attachment Type N <b>00</b> No Ring See Table 3 for Attachment Ring Codes				
<b>Attachment Length</b>	Omit for Attachment Type N Length in One Inch Increments				




### TABLE 1 MATERIAL / FINISH


Aluminum		Stainless Steel	
<b>M</b>	Electroless Nickel	<b>Z1</b>	Passivate
<b>NF</b>	Olive Drab Cadmium	<b>ZM</b>	Nickel-plated
<b>MT</b>	Nickel-PTFE		
<b>ZR</b>	Black Zinc-Nickel		

### TABLE 2 ATTACHMENT TYPE

<b>D</b>	 <b>SST Bead Chain</b> .125 (3.2) diameter, size 6, -65 to +200 °C
<b>F</b>	 <b>Wire Rope, Blue Nylon Jacket</b> 6/6 nylon over stainless steel rope, fair flexibility, good abrasion resistance, -55 to +100 °C
<b>G</b>	 <b>Black Nylon Rope</b> Very flexible, good abrasion and fuel resistance, .094 (2.4) diameter, -55 to +100 °C
<b>H</b>	 <b>Wire Rope, Clear FEP Jacket</b> Clear FEP jacket over SST rope, fair flexibility, good abrasion resistance, .100" diameter, -65 to +200 °C
<b>S</b>	 <b>Sash Chain</b> #8 sash chain, stainless steel. Length tolerance is ± one link .280 (71)
<b>T</b>	 <b>SST Wire Rope, No Jacket</b> Good flexibility, good abrasion resistance, .047 (1.2) diameter, passivated, -65 to +200 °C
<b>U</b>	 <b>SST Wire Rope, Black Polyurethane</b> Black polyurethane coating, very flexible, excellent abrasion resistance, .080" (2mm) diameter, -55 to +125 °C

### TABLE 3 ATTACHMENT RING

EYELET		
	Code	Eyelet I.D.
	<b>06</b>	.125 (3.2)
	<b>01</b>	.140 (3.6)
	<b>02</b>	.182 (4.6)
	<b>04</b>	.197 (5.0)
SOLID RING		
	Code	Ring I.D.
	<b>095</b>	.312 (7.9)
	<b>100</b>	.391 (9.9)
	<b>101</b>	.516 (13.1)
	<b>102</b>	.583 (14.8)
	<b>103</b>	.641 (16.3)
	<b>104</b>	.708 (18.0)
	<b>105</b>	.766 (19.5)
	<b>106</b>	.896 (22.2)
	<b>107</b>	1.016 (25.8)
SPLIT RING		
	Code	Ring I.D.
	<b>52</b>	.485 (12.3)
	<b>54</b>	.640 (16.3)
	<b>56</b>	.750 (19.1)
	<b>58</b>	.890 (22.6)
	<b>60</b>	1.015 (25.8)

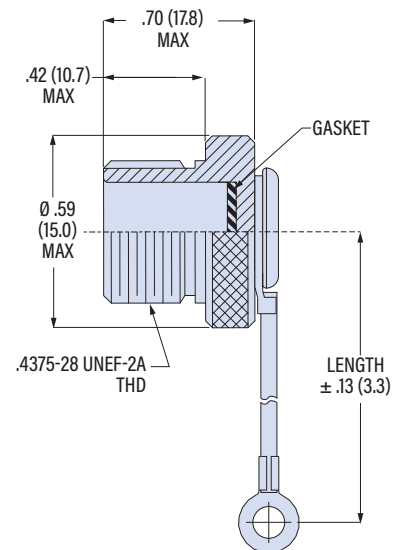



# 660-108

## Protective Cover for TNC Receptacle

### TNC Receptacle Cover



660-106 protective cover fits type N plug connectors. Aluminum or stainless steel, with stainless steel fittings. Silicone gasket.








**TABLE 1 MATERIAL / FINISH**

Aluminum		Stainless Steel	
<b>M</b>	Electroless Nickel	<b>Z1</b>	Passivate
<b>NF</b>	Olive Drab Cadmium	<b>ZM</b>	Nickel-plated
<b>MT</b>	Nickel-PTFE		
<b>ZR</b>	Black Zinc-Nickel		




### PART NUMBER


	<b>660-108</b>	<b>ZR</b>	<b>U</b>	<b>04</b>	<b>-3</b>
<b>Base P/N</b>	<b>660-108</b>				
<b>Material/Finish</b>	See Table 1				
<b>Attachment Type</b>	<b>N</b> No Attachment See Table 2 for Attachment Types				
<b>Attachment Ring</b>	Omit for Attachment Type N <b>00</b> No Ring See Table 3 for Attachment Ring Codes				
<b>Attachment Length</b>	Omit for Attachment Type N Length in One Inch Increments				

**TABLE 2 ATTACHMENT TYPE**

<b>D</b>	 <b>SST Bead Chain</b> .125 (3.2) diameter, size 6, -65 to +200 °C
<b>F</b>	 <b>Wire Rope, Blue Nylon Jacket</b> 6/6 nylon over stainless steel rope, fair flexibility, good abrasion resistance, -55 to +100 °C
<b>G</b>	 <b>Black Nylon Rope</b> Very flexible, good abrasion and fuel resistance, .094 (2.4) diameter, -55 to +100 °C
<b>H</b>	 <b>Wire Rope, Clear FEP Jacket</b> Clear FEP jacket over SST rope, fair flexibility, good abrasion resistance, .100" diameter, -65 to +200 °C
<b>S</b>	 <b>Sash Chain</b> #8 sash chain, stainless steel. Length tolerance is ± one link .280 (Z1)
<b>T</b>	 <b>SST Wire Rope, No Jacket</b> Good flexibility, good abrasion resistance, .047 (1.2) diameter, passivated, -65 to +200 °C
<b>U</b>	 <b>SST Wire Rope, Black Polyurethane</b> Black polyurethane coating, very flexible, excellent abrasion resistance, .080" (2mm) diameter, -55 to +125 °C

**TABLE 3 ATTACHMENT RING**

EYELET		
	<b>Code</b>	<b>Eyelet I.D.</b>
	<b>06</b>	.125 (3.2)
	<b>01</b>	.140 (3.6)
	<b>02</b>	.182 (4.6)
	<b>04</b>	.197 (5.0)
SOLID RING		
	<b>Code</b>	<b>Ring I.D.</b>
	<b>095</b>	.312 (7.9)
	<b>100</b>	.391 (9.9)
	<b>101</b>	.516 (13.1)
	<b>102</b>	.583 (14.8)
	<b>103</b>	.641 (16.3)
	<b>104</b>	.708 (18.0)
	<b>105</b>	.766 (19.5)
	<b>106</b>	.896 (22.2)
	<b>107</b>	1.016 (25.8)
SPLIT RING		
	<b>Code</b>	<b>Ring I.D.</b>
	<b>52</b>	.485 (12.3)
	<b>54</b>	.640 (16.3)
	<b>56</b>	.750 (19.1)
	<b>58</b>	.890 (22.6)
	<b>60</b>	1.015 (25.8)

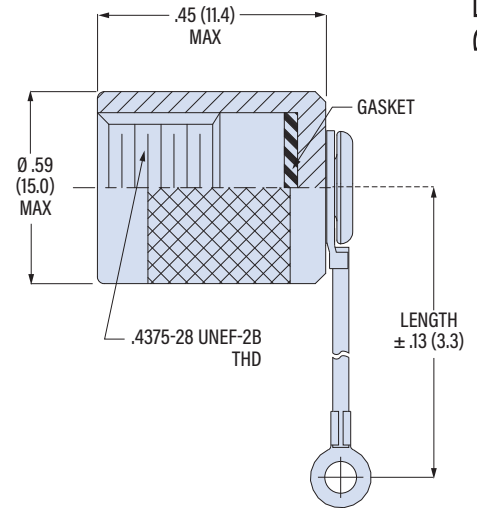

RF CONNECTOR ACCESSORIES

# 660-109

## Protective Cover for BNC Plug

### BNC Plug Cover



660-109 protective cover fits BNC plug connectors. Aluminum or stainless steel, with stainless steel fittings. Silicone gasket.








### PART NUMBER

	<b>660-109</b>	<b>M</b>	<b>H</b>	<b>095</b>	<b>-4</b>
<b>Base P/N</b>	<b>660-109</b>				
<b>Material/Finish</b>	See Table 1				
<b>Attachment Type</b>	<b>N</b> No Attachment See Table 2 for Attachment Types				
<b>Attachment Ring</b>	Omit for Attachment Type N <b>00</b> No Ring See Table 3 for Attachment Ring Codes				
<b>Attachment Length</b>	Omit for Attachment Type N Length in One Inch Increments				




### TABLE 1 MATERIAL / FINISH


Aluminum		Stainless Steel	
<b>M</b>	Electroless Nickel	<b>Z1</b>	Passivate
<b>NF</b>	Olive Drab Cadmium	<b>ZM</b>	Nickel-plated
<b>MT</b>	Nickel-PTFE		
<b>ZR</b>	Black Zinc-Nickel		

### TABLE 2 ATTACHMENT TYPE

<b>D</b>	 <b>SST Bead Chain</b> .125 (3.2) diameter, size 6, -65 to +200 °C
<b>F</b>	 <b>Wire Rope, Blue Nylon Jacket</b> 6/6 nylon over stainless steel rope, fair flexibility, good abrasion resistance, -55 to +100 °C
<b>G</b>	 <b>Black Nylon Rope</b> Very flexible, good abrasion and fuel resistance, .094 (2.4) diameter, -55 to +100 °C
<b>H</b>	 <b>Wire Rope, Clear FEP Jacket</b> Clear FEP jacket over SST rope, fair flexibility, good abrasion resistance, .100" diameter, -65 to +200 °C
<b>S</b>	 <b>Sash Chain</b> #8 sash chain, stainless steel. Length tolerance is ± one link .280 (71)
<b>T</b>	 <b>SST Wire Rope, No Jacket</b> Good flexibility, good abrasion resistance, .047 (1.2) diameter, passivated, -65 to +200 °C
<b>U</b>	 <b>SST Wire Rope, Black Polyurethane</b> Black polyurethane coating, very flexible, excellent abrasion resistance, .080" (2mm) diameter, -55 to +125 °C

### TABLE 3 ATTACHMENT RING


EYELET		
	Code	Eyelet I.D.
	<b>06</b>	.125 (3.2)
	<b>01</b>	.140 (3.6)
	<b>02</b>	.182 (4.6)
	<b>04</b>	.197 (5.0)
SOLID RING		
	Code	Ring I.D.
	<b>095</b>	.312 (7.9)
	<b>100</b>	.391 (9.9)
	<b>101</b>	.516 (13.1)
	<b>102</b>	.583 (14.8)
	<b>103</b>	.641 (16.3)
	<b>104</b>	.708 (18.0)
	<b>105</b>	.766 (19.5)
	<b>106</b>	.896 (22.2)
	<b>107</b>	1.016 (25.8)
SPLIT RING		
	Code	Ring I.D.
	<b>52</b>	.485 (12.3)
	<b>54</b>	.640 (16.3)
	<b>56</b>	.750 (19.1)
	<b>58</b>	.890 (22.6)
	<b>60</b>	1.015 (25.8)

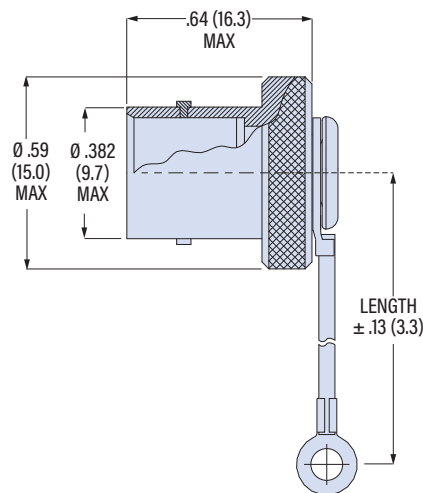

# 660-110

## Protective Cover for BNC Receptacle

### BNC Receptacle Cover



660-110 protective cover fits BNC receptacle connectors. Aluminum or stainless steel, with stainless steel fittings. Silicone gasket.








**TABLE 1 MATERIAL / FINISH**

Aluminum		Stainless Steel	
<b>M</b>	Electroless Nickel	<b>Z1</b>	Passivate
<b>NF</b>	Olive Drab Cadmium	<b>ZM</b>	Nickel-plated
<b>MT</b>	Nickel-PTFE		
<b>ZR</b>	Black Zinc-Nickel		




### PART NUMBER

<b>660-110</b>	<b>M</b>	<b>H</b>	<b>095</b>	<b>-4</b>
<b>Base P/N</b>	<b>660-110</b>			
<b>Material/Finish</b>	See Table 1			
<b>Attachment Type</b>	<b>N</b> No Attachment See Table 2 for Attachment Types			
<b>Attachment Ring</b>	Omit for Attachment Type N <b>00</b> No Ring See Table 3 for Attachment Ring Codes			
<b>Attachment Length</b>	Omit for Attachment Type N Length in One Inch Increments			

**TABLE 2 ATTACHMENT TYPE**

<b>D</b>	 <b>SST Bead Chain</b> .125 (3.2) diameter, size 6, -65 to +200 °C
<b>F</b>	 <b>Wire Rope, Blue Nylon Jacket</b> 6/6 nylon over stainless steel rope, fair flexibility, good abrasion resistance, -55 to +100 °C
<b>G</b>	 <b>Black Nylon Rope</b> Very flexible, good abrasion and fuel resistance, .094 (2.4) diameter, -55 to +100 °C
<b>H</b>	 <b>Wire Rope, Clear FEP Jacket</b> Clear FEP jacket over SST rope, fair flexibility, good abrasion resistance, .100" diameter, -65 to +200 °C
<b>S</b>	 <b>Sash Chain</b> #8 sash chain, stainless steel. Length tolerance is ± one link .280 (Z1)
<b>T</b>	 <b>SST Wire Rope, No Jacket</b> Good flexibility, good abrasion resistance, .047 (1.2) diameter, passivated, -65 to +200 °C
<b>U</b>	 <b>SST Wire Rope, Black Polyurethane</b> Black polyurethane coating, very flexible, excellent abrasion resistance, .080" (2mm) diameter, -55 to +125 °C

**TABLE 3 ATTACHMENT RING**

EYELET		
	<b>Code</b>	<b>Eyelet I.D.</b>
	<b>06</b>	.125 (3.2)
	<b>01</b>	.140 (3.6)
	<b>02</b>	.182 (4.6)
	<b>04</b>	.197 (5.0)
SOLID RING		
	<b>Code</b>	<b>Ring I.D.</b>
	<b>095</b>	.312 (7.9)
	<b>100</b>	.391 (9.9)
	<b>101</b>	.516 (13.1)
	<b>102</b>	.583 (14.8)
	<b>103</b>	.641 (16.3)
	<b>104</b>	.708 (18.0)
	<b>105</b>	.766 (19.5)
	<b>106</b>	.896 (22.2)
	<b>107</b>	1.016 (25.8)
SPLIT RING		
	<b>Code</b>	<b>Ring I.D.</b>
	<b>52</b>	.485 (12.3)
	<b>54</b>	.640 (16.3)
	<b>56</b>	.750 (19.1)
	<b>58</b>	.890 (22.6)
	<b>60</b>	1.015 (25.8)

