



SPEAKERPHONE

Model: TALK-6301

Defend Grade: IP54

Communication System: Analogue

Material: 304 Stainless Steel

Designed to automatically dial a preprogrammed number from 1-11 digits.

Press the button to make a handsfree disconnect call. Telephone can be set for other function keys like repeat, speed dial, volume control, etc. Equipped with weatherproof, puncture resistant speaker and microphone.



Technical Parameters

Power Supply	Telephone Line Powered
Voltage	DC 24-72V (nominal voltage 48V)
Standby Work Current	≤1mA
Frequency Response	250 - 3000 Hz
Ringer Volume	>80dB(A)
Corrosion Grade	WF1
Ambient Temperature	-40 - +70°C
Atmospheric Pressure	80 - 110KPa
Relative Humidity	≤95%
Anti-vandalism Level	IK9
Installation	Embedded



Application


The Intercom usually used in Clean room, Laboratory, Hospital Isolation areas, Sterile areas, and other restricted environments. Also available for Elevators/Lifts, Parking lots, Prisons, Railway/Metro platforms, Hospitals, Police stations, ATM machines, Stadiums, Campus, Shopping malls, Doors, Hotels, outside building etc.



Features

1. Standard Analogue phone. SIP version available.
2. Robust housing, constructed of 304 stainless steel material.
3. 4 X Tamper proof screws for mounting
4. Hands-free Operation.
5. Vandal resistant stainless steel keypad.
6. Flush Mounting.
7. Weather proof protection IP54.
8. Connection: RJ11 screw terminal pair cable.
9. Self-made telephone spare part available.
10. CE, FCC, RoHS, ISO9001 compliant.

Product Dimensions

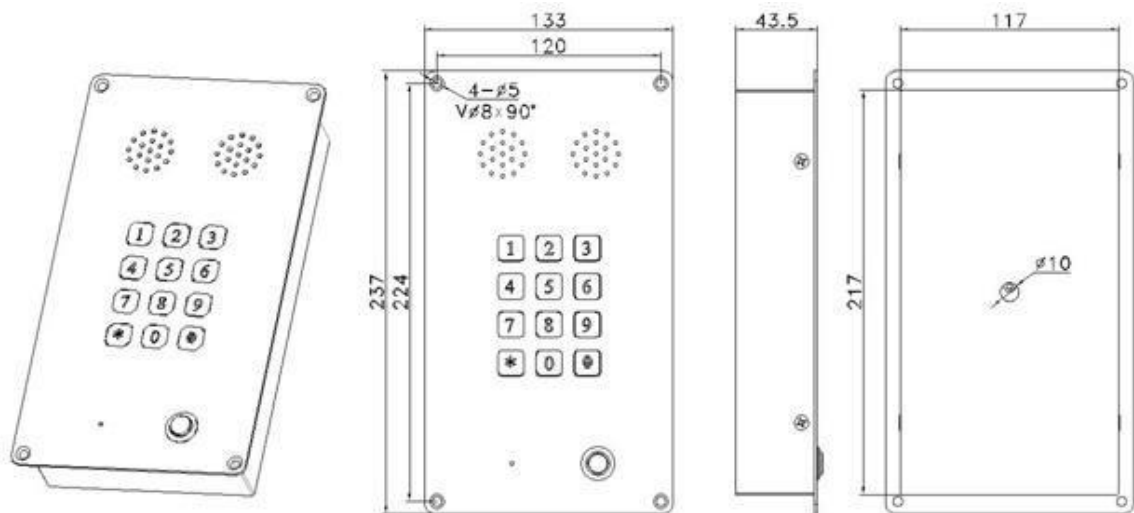

Package

Unit size: 133 x 237 x 43.5 mm

Carton size: 530 x 350 x 350 mm

Packaging materials: Pearl cotton,

Carton Net weight: 1.8 kg

Gross weight: 2 kg



Service and Support

Under normal use, non-human damage, free **ONE YEAR WARRANTY**.