

**JUMPER-S38-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 3/8" Superflexible Foam

Radio Frequency Systems' CELLFLEX® Factory-Fit Jumpers feature specially designed connectors which are soldered-on in a strictly controlled industrial process to ensure industry leading performance for today's high-performance wireless systems. The connector design and manufacturing process has been optimized to produce premium VSWR and IM levels. Injection molded boots provide reliable and repeatable additional sealing level and strain relief. Our facilities produce and stock all popular lengths as required by the industry, and can deliver custom lengths with premium VSWR and IM levels on request.

**FEATURES / BENEFITS**

- **Stable premium VSWR, outstanding and consistent intermodulation performance - 4.3-10 side not relying on coupling torque**  
Improves network performance, reduces the number of dropped calls and avoids revenue loss.
- **Waterproof to IP 68**  
No downtime risk, secures revenue.
- **Smaller connector footprint for 4.3-10**  
Enables tighter spacing of connections for antennas and RRHs.
- **Available with standard ""J"" or flame retardant ""JFN"" jacket types**  
Usable in all applications.
- **Compliant to RoHS (EU) and CRoHS (China)**  
Usable on a global basis.



7M7MRS38-0100FFP for EXAMPLE

**Technical features****STRUCTURE**

Cable Type		3/8" Superflexible Foam
Jumper Type		Factory-Fit (Premium)
Dielectric		PTFE
Gasket		Silicone rubber
Jacket		Black Polyethylene, Halogen-free acc. IEC 60754-1 and -2

**MECHANICAL SPECIFICATIONS**

Minimum Bend Radius	mm (in)	25 (0.98)
---------------------	---------	-----------

**TESTING AND ENVIRONMENTAL**

Sealing class		IP68
---------------	--	------

**TEMPERATURE SPECIFICATIONS**

Installation Temperature	°C (°F)	-40 to 60 (-40 to 140 )
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185 )
Storage Temperature	°C (°F)	-70 to 85 (-94 to 185 )

**ELECTRICAL SPECIFICATIONS**

Intermodulation, 3rd Order	dBc	≤ -159 static & dynamic (-161 typical)
----------------------------	-----	--

**JUMPER VSWR 0 - 10 M**

Frequency [MHz]	Straight / Straight [dB] (VSWR)	Right Angle / Right Angle [dB] (VSWR)
0 - 1000	>28.0 (≤1.08)	>28.0 (≤1.08)
>1000-1700	>28.0 (≤1.08)	>26.4 (≤1.10)
>1700-2200	>28.0 (≤1.08)	>26.4 (≤1.10)
>2200-2700	>26.4 (≤1.10)	>24.9 (≤1.12)
>2700-3800	>23.1 (≤1.15)	>20.8 (≤1.20)
>3800-5000	>20.8 (≤1.20)	>19.1 (≤1.25)
>5000-6000	>17.7 (≤1.30)	>17.7 (≤1.30)

**JUMPER-S38-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 3/8" Superflexible Foam

**JUMPER VSWR 10 - 20 M**

Frequency [MHz]	Straight / Straight [dB] (VSWR)	Right Angle / Right Angle [dB] (VSWR)
0 - 1000	>28.0 ( $\leq 1.08$ )	>28.0 ( $\leq 1.08$ )
>1000-1700	>26.4 ( $\leq 1.10$ )	>24.0 ( $\leq 1.14$ )
>1700-2200	>26.4 ( $\leq 1.10$ )	>24.0 ( $\leq 1.14$ )
>2200-2700	>24.9 ( $\leq 1.12$ )	>24.0 ( $\leq 1.14$ )
>2700-3800	>23.1 ( $\leq 1.15$ )	>19.1 ( $\leq 1.25$ )
>3800-5000	>19.1 ( $\leq 1.25$ )	>18.2 ( $\leq 1.28$ )
>5000-6000	>17.7 ( $\leq 1.30$ )	>16.0 ( $\leq 1.38$ )

**COMBINATIONS**

Model Name	Connector 1	Connector 2
7M7MS38-XXXXFFP	7-16 Male	7-16 Male
7M7FS38-XXXXFFP	7-16 Male	7-16 Female
7M7MRS38-XXXXFFP	7-16 Male	7-16 Male Right Angle
7M43MS38-XXXXFFP	7-16 Male	4.3-10 Male
7M43FS38-XXXXFFP	7-16 Male	4.3-10 Female
7M43MRS38-XXXXFFP	7-16 Male	4.3-10 Male Right Angle
7MNM38-XXXXFFP	7-16 Male	N-Male
7MNF38-XXXXFFP	7-16 Male	N-Female
7MNMRS38-XXXXFFP	7-16 Male	N-Male Right Angle
7F7FS38-XXXXFFP	7-16 Female	7-16 Female
7F7MRS38-XXXXFFP	7-16 Female	7-16 Male Right Angle
7F43MS38-XXXXFFP	7-16 Female	4.3-10 Male
7F43FS38-XXXXFFP	7-16 Female	4.3-10 Female
7F43MRS38-XXXXFFP	7-16 Female	4.3-10 Male Right Angle
7FNMS38-XXXXFFP	7-16 Female	N-Male
7FNFS38-XXXXFFP	7-16 Female	N-Female
7MR7MRS38-XXXXFFP	7-16 Male Right Angle	7-16 Male Right Angle
7MR43MS38-XXXXFFP	7-16 Male Right Angle	4.3-10 Male
7MR43FS38-XXXXFFP	7-16 Male Right Angle	4.3-10 Female
7MR43MRS38-XXXXFFP	7-16 Male Right Angle	4.3-10 Male Right Angle
7MRNMS38-XXXXFFP	7-16 Male Right Angle	N-Male
7MRNFS38-XXXXFFP	7-16 Male Right Angle	N-Female
43M43MS38-XXXXFFP	4.3-10 Male	4.3-10 Male
43M43FS38-XXXXFFP	4.3-10 Male	4.3-10 Female
43M43MRS38-XXXXFFP	4.3-10 Male	4.3-10 Male Right Angle
43MNM38-XXXXFFP	4.3-10 Male	N-Male
43MNF38-XXXXFFP	4.3-10 Male	N-Female
43MNMRS38-XXXXFFP	4.3-10 Male	N-Male Right Angle
43F43FS38-XXXXFFP	4.3-10 Female	4.3-10 Female

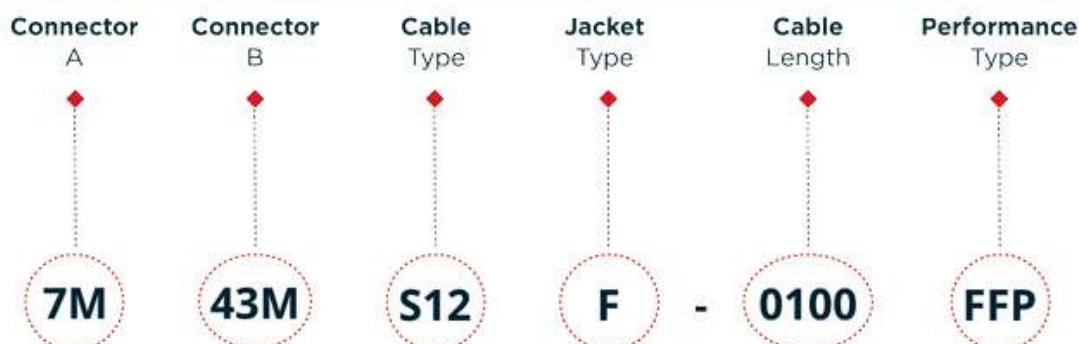
**JUMPER-S38-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 3/8" Superflexible Foam

<b>43F43MRS38-XXXXFFP</b>	4.3-10 Female	4.3-10 Male Right Angle
<b>43FNMS38-XXXXFFP</b>	4.3-10 Female	N-Male
<b>43FNFS38-XXXXFFP</b>	4.3-10 Female	N-Female
<b>43MR43MRS38-XXXXFFP</b>	4.3-10 Male Right Angle	4.3-10 Male Right Angle
<b>43MRNMS38-XXXXFFP</b>	4.3-10 Male Right Angle	N-Male
<b>43MRNFS38-XXXXFFP</b>	4.3-10 Male Right Angle	N-Female
<b>NMNMS38-XXXXFFP</b>	N-Male	N-Male
<b>NMNFS38-XXXXFFP</b>	N-Male	N-Female
<b>NMNMRS38-XXXXFFP</b>	N-Male	N-Male Right Angle
<b>NFNFS38-XXXXFFP</b>	N-Female	N-Female
<b>NFNMRS38-XXXXFFP</b>	N-Female	N-Male Right Angle
<b>NMRNMRS38-XXXXFFP</b>	N-Male Right Angle	N-Male Right Angle
<b>NMNXMS38-XXXXFFP</b>	N-Male	NEX10 Male
<b>43MNXMS38-XXXXFFP</b>	4.3-10 Male	NEX10 Male
<b>7M43MPS38-XXXXFFP</b>	7-16 Male	4.3-10 Male Push/Pull
<b>7F43MPS38-XXXXFFP</b>	7-16 Female	4.3-10 Male Push/Pull
<b>7MR43MPS38-XXXXFFP</b>	7-16 Male Right Angle	4.3-10 Male Push/Pull
<b>43M43MPS38-XXXXFFP</b>	4.3-10 Male	4.3-10 Male Push/Pull
<b>43MP43FS38-XXXXFFP</b>	4.3-10 Male Push/Pull	4.3-10 Female
<b>43MP43MRS38-XXXXFFP</b>	4.3-10 Male Push/Pull	4.3-10 Male Right Angle
<b>43MPNMS38-XXXXFFP</b>	4.3-10 Male Push/Pull	N-Male
<b>43MPNFS38-XXXXFFP</b>	4.3-10 Male Push/Pull	N-Female
<b>43MPNMRS38-XXXXFFP</b>	4.3-10 Male Push/Pull	N-Male Right Angle
<b>43MPNXMS38-XXXXFFP</b>	4.3-10 Male Push/Pull	NEX10 Male
<b>XXXX in the model name is the length; as well for jumper with boots acc. to nomenclature</b>		

**JUMPER-S38-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 3/8" Superflexible Foam

**RFS JUMPER MODEL NOMENCLATURE****7M & 43M  
CONNECTORS  
A & B**

<b>7M</b>	7-16 Male
<b>7F</b>	7-16 Female
<b>7MR</b>	7-16 Male Right Angle
<b>43M</b>	4.3-10 Male
<b>43F</b>	4.3-10 Female
<b>43MH</b>	4.3-10 Male Handscrew
<b>43MP</b>	4.3-10 Male Push Pull
<b>43MR</b>	4.3-10 Male Right Angle
<b>NM</b>	N-Type Male
<b>NF</b>	N-Type Female
<b>NMR</b>	N-Type Male Right Angle
<b>NXM</b>	NEX10 Male
<b>NXMP</b>	NEX10 Male Push Pull
<b>7MB</b>	7-16 Male with Weatherboots
<b>43MB</b>	4.3-10 Male with Weatherboots
<b>NMB</b>	N-Type Male with Weatherboots

**S12  
CABLE  
TYPE**

<b>L38</b>	3/8" Low Loss Coax
<b>L12</b>	1/2" Low Loss Coax
<b>S14</b>	1/4" Superflexible Coax
<b>S38</b>	3/8" Superflexible Coax
<b>S12</b>	1/2" Superflexible Coax

**F  
JACKET  
TYPE**

<b>F</b>	JFN Flame Retardant
<b>Blank</b>	PE

**0100  
CABLE  
LENGTH\***

<b>0100</b>	1 meter
<b>0200</b>	2 meter
<b>0250</b>	2.5 meter
<b>1000</b>	10 meter
<b>1500</b>	15 meter
<b>030</b>	3 feet
<b>060</b>	6 feet
<b>100</b>	10 feet
<b>150</b>	15 feet
<b>200</b>	20 feet

**FFP  
JUMPER  
PERFORMANCE**

<b>FFP</b>	Factory-Fit Premium
<b>FFS</b>	Factory-Fit Standard
<b>UPM</b>	Ultra PIM Performance

**NOTES:**

\* 4 digits indicate meter length, 3 digits indicate feet length  
Others lengths available on request

**External Document Links**

[Cable SCF38-50J](#)  
[Handling instruction](#)  
[Jumper Brochure](#)

**Notes**