



Four-way Reactive Power Splitter, 555–2700 MHz, DC Pass all ports
(Additional mounting bracket PN:42396A-17 sold separately)

OBSOLETE

This product was discontinued on: July 31, 2021

Replaced By:

S-4-UW-H-43-I6 Ultra Wideband Four-way Low PIM Reactive High Power Splitter, 555–6000 MHz (Additional mounting bracket PN:42396A-17 sold separately)

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Product Type	Power splitter


General Specifications

Device Type	Splitter
Application	Indoor/Outdoor
Color	Silver
Inner Contact Plating	Silver
Interface	7-16 DIN Female
Outer Contact Plating	Trimetal

Dimensions

Height	49 mm 1.929 in
Width	73 mm 2.874 in
Length	239 mm 9.409 in

Outline Drawing

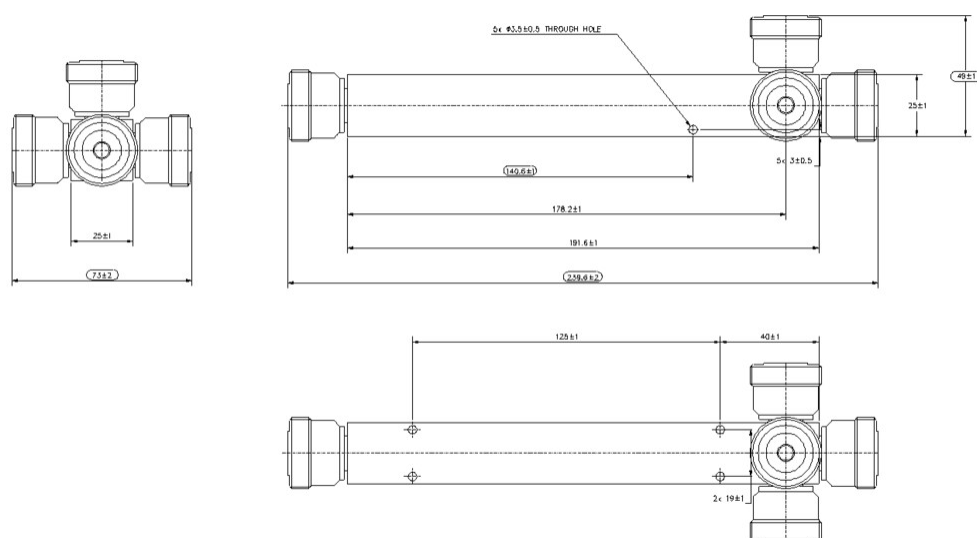

Electrical Specifications

3rd Order IMD	-160 dBc
3rd Order IMD Test Method	Two +43 dBm carriers
Insertion Loss at Frequency Band	0.3 dB @ 698–2700 MHz 0.4 dB @ 555–698 MHz
Average Power, maximum	300 W
Impedance	50 ohm
Operating Frequency Band	555 – 2700 MHz
Peak Power, maximum	3 kW
Power Rating, Splitting	300 W
Reflected Power, maximum	300 W
Split Loss	6 dB
VSWR at Frequency Band	1.3:1 @ 698–2700 MHz 1.93:1 @ 555–698 MHz

Mechanical Specifications

Coupling Nut Proof Torque 25 N-m | 221.269 in lb

Environmental Specifications

Operating Temperature	-35 °C to +85 °C (-31 °F to +185 °F)
Relative Humidity	Up to 100%
Ingress Protection Test Method	IEC 60529:2001, IP65

Packaging and Weights

Height, packed	75 mm 2.953 in
Width, packed	98 mm 3.858 in
Length, packed	290 mm 11.417 in
Volume	2131500 mm³ 130.073 in³
Weight, gross	0.69 kg 1.521 lb
Weight, net	0.59 kg 1.301 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant

