Single Multi-block hanger three layer, with angle member adapter

Single Multi block hanger support systems are designed for organizing bundled runs of coax cable.

Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.

FEATURES / BENEFITS

- Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- They come including angle member adapter and necessary hardware.
- The angle member adapter fastens the clamp to the tower without drilling.
- The angle member adapter includes a tower member set screw.
- The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.



MBHS78-3-F

Technical features

GENERAL SPECIFICATIONS	

Product Line	Coaxial Cable Accessories Hybrid Cable Accessories	
Product Type	Hanger	
Hanger Type	Single Multi-block	
Transmission Line Type	UCF78 LCF78 HB078	
Cable Type	Coaxial Foam Dielectric Hybrid	
Color	Black	
MECHANICAL SPECIFICATIONS		

Operation Temperature

Storage Temperature

Cable Size		7/8	
Number of Cable / Waveguide Runs		1 per layer, 3 layers, 3 runs	
Configuration		incl. Angle member adapter	
Angle member adapter clamping range mm (in)		4 / 24 (0.157 / 0.945)	
Angle member adpter threads		2x M8	
Material		Metal part: Stainless steel Plastic parts: Polypropylene	
Length	mm (in)	234 (9.21) see picture below (L)	
Height	mm (in)	70 (2.73) see picture below (H)	
Width	mm (in)	50 (1.96) see picture below (W)	
Recommended / Maximum Clamp Spacing	m (ft)	0.8 / 1 (2.75 / 3.25)	
TEMPERATURE SPECIFICATIONS			

www.rfsworld.com MBHS78-3-F REV: D REV DATE: 05.Apr.2017

-50 to 85 (-58 to 185)

-50 to 85 (-58 to 185)


°C (°F)

°C (°F)



Single Multi-block hanger three layer, with angle member adapter

PACKAGING INFORMATION		
Package Quantity		10
Weight per piece	kg (lb)	0.288 (0.63)
Weight per kit	kg (lb)	3.1 (6.8)
Box Dimensions (Bulk Shipping),	mm (in)	270 x 230 x 115 (11.63 x 9.05 x 4.52)

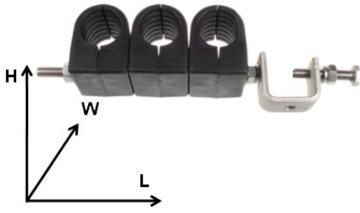

picture shows MBHS78-3-F for illustration purpose

External Document Links Installation Instruction

Notes

MBHS78-3-FREV : DREV DATE : 05.Apr.2017www.rfsworld.com