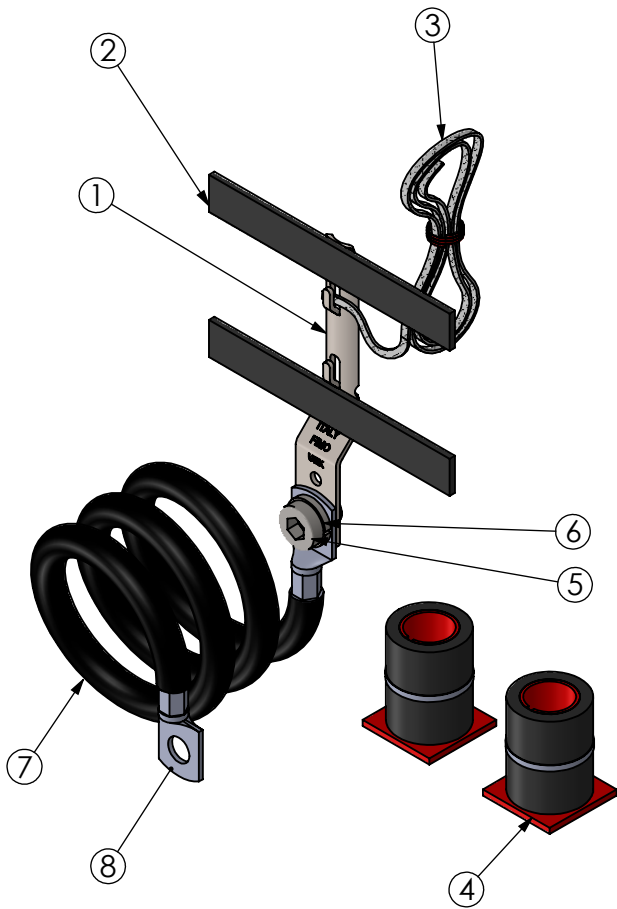


PRODUCT DATA SHEET



A) SPECIFICATIONS

- 1 Tinned Brass contact bar
- 2 Butyl strip
- 3 Tin-plated copper mesh
- 4 Protecting and sealing self-agglomerating silicone tape. Color black on reel
- 5 Stainless Steel M8 connection screw
- 6 Stainless Steel grower washer
- 7 Rigid 7x1.70= 16mm² copper cable, black P.E. insulation
- 8 Cable lug Ø8: Tinned copper

B) RESISTANCE TEST

Lightning test:

Peak Current 100 kA (10/350 µs)
 Charge 50C
 Protection Level III-IV in accordance with IEC 61312-1 Standard

Water Tightness:

IP 68 (FIMO Test in accordance with IEC60529)

Corrosion Test:

Salt Spray test in accordance with ISO 9227 Standard

Contact Resistance: $\leq 1\text{ mOhm}$

Operating Temperature: -50°C +80 °C



C) DELIVERY MODALITIES



Packing in boxes ok 10 kits
 Label indicanting:
 product code, article, production, batch
 FIMO logo and picture
 (customer code on request)

D) MOUNTING INSTRUCTION

UEK IST 024 REV 0

| | |
|---------|-------------------|
| code | 6115020002 |
| article | UEK 2 |

| | |
|---|---|
|  |  |
| 10 | 0.0823kg |

| RI | DATE | DR | DATE | AP | Description: UEK 2=universal earthing kit d. 12-30 |
|--|------------|---|------------|------|---|
| 02 | | | | | |
| 01 | 14/03/2016 | E.B. | 14/03/2016 | A.V. | |
| 00 | 17/06/2014 | E.B. | 17/06/2014 | A.V. | |
| 1 ST EMISSION | | | | | Use: Earthing of coaxial cables and elliptic or rectangular waveguides Coaxial Cable : 1/2"S - 3/8" - 1/2" - 5/8" - 7/8"S - 7/8" Elliptic guide : 105 - 127 - 130 - 150 - 190 |
|  | |  | | | |